



Protective clothing

X-ray protective clothing

905 *LytaType* wrap-around coat

Features

- > Front opening all-round coat with front VELCRO® fastening.
- > Fitted with padded shoulders for extra comfort.
- > Wide front doubles the stated protection at the overlap.

Tailor made

- > Tailor made *LytaType* personal x-ray protective clothing is available. Please contact us for required measurements.

Model 905

Optional extras shown: -
900/001 pocket
9/B15 support belt,
951/05 thyroid collar



LytaType colours and codes


Please note the colours shown are approximate.
A colour swatch is available on request.



Royal
02



Navy
04



Poppy
11



Silver grey
40



Bottle Green
41

- Ⓢ Small for chest sizes (A) 80 – 90 cm girth
Protection is double where the front of the apron overlaps

| Lead equivalent (Pb)* Front and back | Length (B) | Maximum girth Waist (C) & hip (D) | Product code |
|---|------------|--------------------------------------|--------------|
| 0.25 / 0.25 mm | 85 cm | 100 cm | 905/22/085/S |
| " | 90 cm | " | 905/22/090/S |
| " | 100 cm | " | 905/22/100/S |
| " | 110 cm | " | 905/22/110/S |
| 0.25 / 0.35 mm | 85 cm | 100 cm | 905/23/085/S |
| " | 90 cm | " | 905/23/090/S |
| " | 100 cm | " | 905/23/100/S |
| " | 110 cm | " | 905/23/110/S |
| 0.35 / 0.35 mm | 85 cm | 100 cm | 905/33/085/S |
| " | 90 cm | " | 905/33/090/S |
| " | 100 cm | " | 905/33/100/S |
| " | 110 cm | " | 905/33/110/S |

*Pb: Lead vinyl in accordance with BS EN 61331-1:2014 in the 50 to 150 kV range of x-ray tube voltages.



Protective clothing

- M** Medium for chest sizes (A) 90 – 100 cm girth
Protection is double where the front of the apron overlaps

| Lead equivalent (Pb)* Front and back | Length (B) | Maximum girth Waist (C) & hip (D) | Product code |
|---|------------|--------------------------------------|--------------|
| 0.25 / 0.25 mm | 90 cm | 100 cm | 905/22/090/M |
| " | 100 cm | " | 905/22/100/M |
| " | 110 cm | " | 905/22/110/M |
| 0.25 / 0.35 mm | 90 cm | 100 cm | 905/23/090/M |
| " | 100 cm | " | 905/23/100/M |
| " | 110 cm | " | 905/23/110/M |
| 0.35 / 0.35 mm | 90 cm | 100 cm | 905/33/090/M |
| " | 100 cm | " | 905/33/100/M |
| " | 110 cm | " | 905/33/110/M |

*Pb: Lead vinyl in accordance with BS EN 61331-1:2014 in the 50 to 150 kV range of x-ray tube voltages.


- L** Large for chest sizes (A) 100 – 120 cm girth
Protection is double where the front of the apron overlaps

| Lead equivalent (Pb)* Front and back | Length (B) | Maximum girth Waist (C) & hip (D) | Product code |
|---|------------|--------------------------------------|--------------|
| 0.25 / 0.25 mm | 90 cm | 120 cm | 905/22/090/L |
| " | 100 cm | " | 905/22/100/L |
| " | 110 cm | " | 905/22/110/L |
| 0.25 / 0.35 mm | 90 cm | 120 cm | 905/23/090/L |
| " | 100 cm | " | 905/23/100/L |
| " | 110 cm | " | 905/23/110/L |
| 0.35 / 0.35 mm | 90 cm | 120 cm | 905/33/090/L |
| " | 100 cm | " | 905/33/100/L |
| " | 110 cm | " | 905/33/110/L |

*Pb: Lead vinyl in accordance with BS EN 61331-1:2014 in the 50 to 150 kV range of x-ray tube voltages.

Also available: -

| Lead equivalent front and back | Product code |
|---|------------------------|
| Front 0.25 mm, back 0.50 mm @ 0.25 / 0.25 mm prices plus 20% | 905/25/+ length/+ size |
| Front 0.35 mm, back 0.50 mm @ 0.25 / 0.25 mm prices plus 25% | 905/35/+ length/+ size |
| Front 0.50 mm, back 0.50 mm @ 0.25 / 0.25 mm prices plus 30% | 905/55/+ length/+ size |
| Please add length and S, M, or L (small, medium or large) to the applicable product code. | |
| Example: 0.25 front (2), 0.50 back (5), 90 cm long and medium size: | 905/25/090/M |

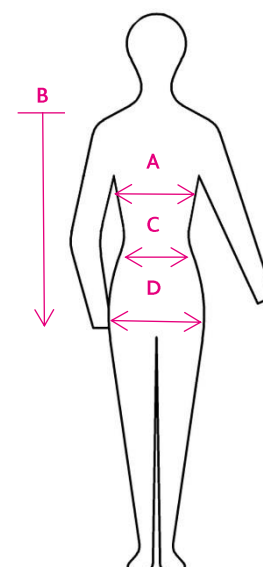

Optional extras: -

| Description | Product code |
|---|--------------|
| Pocket | 900/001 |
| Embroidery in a position to be specified | 9/B20 |
| Lumbar support belt elasticated type transfers weight to the hips | 9/B15 |
| Thyroid collar | 951/05 |

9/B15



Kenex are certified to Regulation (EU) 2016/425 (PPE) for the design and manufacture of x-ray protective clothing. LytaType aprons and thyroid collars comply with the requirements of BS EN 61331-3:2014 and BS EN 13402-3:2013. They include lead (Pb) vinyl material tested for use with a 50 to 150 kV range of x-ray tube voltages, as specified in BS EN 61331-1:2014.

Notified body: SGS UK Ltd, England BS22 OWA. Identification number CE0120.