



Protective clothing

X-ray protective clothing

909 *LytaType* cross back apron

Features

- > Excellent design transfers weight from the shoulders to the hips.
- > Elasticated flaps fasten at the sides.

Tailor made

- > Tailor made *LytaType* personal x-ray protective clothing is available. Please contact us for required measurements.

LytaType colours and codes


Please note the colours shown are approximate. A colour swatch is available on request.



Royal
02



Navy
04



Poppy
11



Silver grey
40



Bottle Green
41



Model 909
Pocket 900/001 shown
as an optional extra



S Small for chest sizes (A) 80 – 90 cm girth

Lead equivalent (Pb)* Front and back	Length (B)	Apron width Shoulder / hip	Maximum girth Waist (C) & hip (D)	Product code
0.25 / 0.25 mm	85 cm	40 cm / 60 cm	100 cm	909/22/085/S
"	90 cm	"	"	909/22/090/S
"	100 cm	"	"	909/22/100/S
"	110 cm	"	"	909/22/110/S
0.35 / 0.25 mm	85 cm	40 cm / 60 cm	100 cm	909/32/085/S
"	90 cm	"	"	909/32/090/S
"	100 cm	"	"	909/32/100/S
"	110 cm	"	"	909/32/110/S
0.50 / 0.25 mm	85 cm	40 cm / 60 cm	100 cm	909/52/085/S
"	90 cm	"	"	909/52/090/S
"	100 cm	"	"	909/52/100/S
"	110 cm	"	"	909/52/110/S

*Pb: Lead vinyl in accordance with BS EN 61331-1:2014 in the 50 to 150 kV range of x-ray tube voltages.



Kenex (Electro-Medical) Ltd
Unit 17, RO24 Greenway, Harlow Business Park, Harlow, Essex CM19 5QB, England
T: +44 (0)1279 417241 F: +44 (0)1279 443749 E: kenex@kenex.co.uk www.kenex.co.uk



Protective clothing

M Medium for chest sizes (A) 90 – 100 cm girth

Lead equivalent (Pb)* Front and back	Length (B)	Apron width Shoulder / hip	Maximum girth Waist (C) & hip (D)	Product code
0.25 / 0.25 mm	90 cm	48 cm / 60 cm	100 cm	909/22/090/M
"	100 cm	"	"	909/22/100/M
"	110 cm	"	"	909/22/110/M
0.35 / 0.25 mm	90 cm	48 cm / 60 cm	100 cm	909/32/090/M
"	100 cm	"	"	909/32/100/M
"	110 cm	"	"	909/32/110/M
0.50 / 0.25 mm	90 cm	48 cm / 60 cm	100 cm	909/52/090/M
"	100 cm	"	"	909/52/100/M
"	110 cm	"	"	909/52/110/M

*Pb: Lead vinyl in accordance with BS EN 61331-1:2014 in the 50 to 150 kV range of x-ray tube voltages.


L Large for chest sizes (A) 100 – 120 cm girth

Lead equivalent (Pb)* Front and back	Length (B)	Apron width Shoulder / hip	Maximum girth Waist (C) & hip (D)	Product code
0.25 / 0.25 mm	90 cm	48 cm / 75 cm	120 cm	909/22/090/L
"	100 cm	"	"	909/22/100/L
"	110 cm	"	"	909/22/110/L
0.35 / 0.25 mm	90 cm	48 cm / 75 cm	120 cm	909/32/090/L
"	100 cm	"	"	909/32/100/L
"	110 cm	"	"	909/32/110/L
0.50 / 0.25 mm	90 cm	48 cm / 75 cm	120 cm	909/52/090/L
"	100 cm	"	"	909/52/100/L
"	110 cm	"	"	909/52/110/L

*Pb: Lead vinyl in accordance with BS EN 61331-1:2014 in the 50 to 150 kV range of x-ray tube voltages.

Optional extras: -

Description	Product code
Pocket	900/001
Embroidery in a position to be specified	9/B20

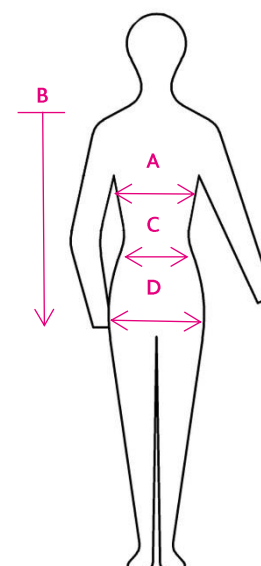

Kenex are certified to Directive 89/686/EEC (PPE) for the design and manufacture of x-ray protective clothing. LytaType aprons and thyroid collars comply with the requirements of BS EN 61331-3:2014 and BS EN 13402-3:2013. They include lead (Pb) vinyl material tested for use with a 50 to 150 kV range of x-ray tube voltages, as specified in BS EN 61331-1:2014.

Notified body: SGS UK Ltd, England BS22 OWA. Identification number CE0120.